


M16 孔位排列

The hole place arranges

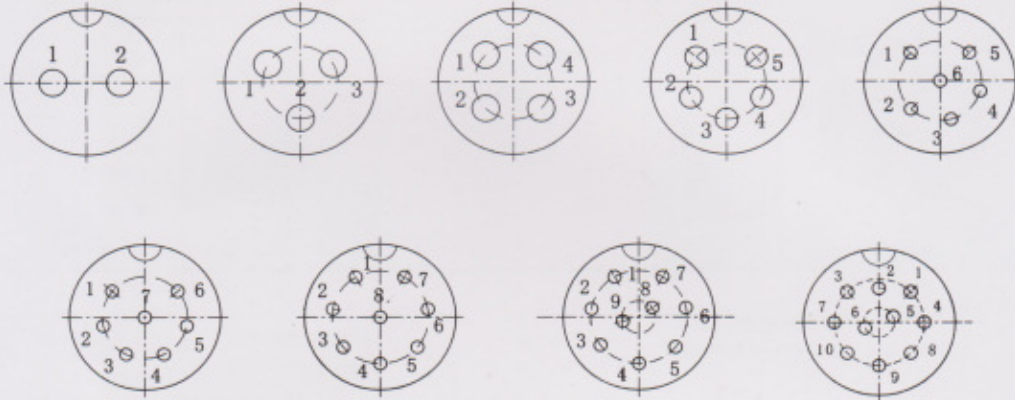

M16 技术参数

Technology parameter

芯数 NO. OF CONTACTS	2	3	4	5	6	7	8	9	10
额定电流/电压 Rated current / voltage	7A-125V	7A-125V	7A-125V	5A-125V	4A-125V	4A-125V	4A-125V	4A-125V	4A-125V
工作电压 (AC.V) 分钟 Operation limit voltage (AC.V.rms)	200	200	200	200	200	200	200	200	200
耐电压 (AC.V) 分钟 Withstanding voltage (AC.V.rms) 1 minute	1500	1500	1500	1500	1500	1500	1500	1500	1500
绝缘阻抗(MΩ) DC500V Insulation resistance(MΩMIN.) at DC 500V	1500	1500	1500	1500	2000	2000	2000	2000	2000
接触阻抗(MΩ) DC1A Contact resistance (MΩ MAX.) AT DC 1A	10	10	10	10	10	10	10	10	10
焊杯口径φ (mm) Solder cup mouth aperture	1.5	1.5	1.5	1.2	0.8	0.8	0.8	0.8	0.8
接触体孔径φ (mm) Solder inter diameter	2.5	2.5	2.5	2	1.2	1.2	1.2	1.2	1.2